


PFA Label Material

- Halogen-free self-adhesive label on sheet for direct marking of components in control cabinets.
- Label modules pre-perforated in standardized 17.5 mm units.
- Print-out by laser printer.
- Installation time can be 4 times faster than label combination systems.

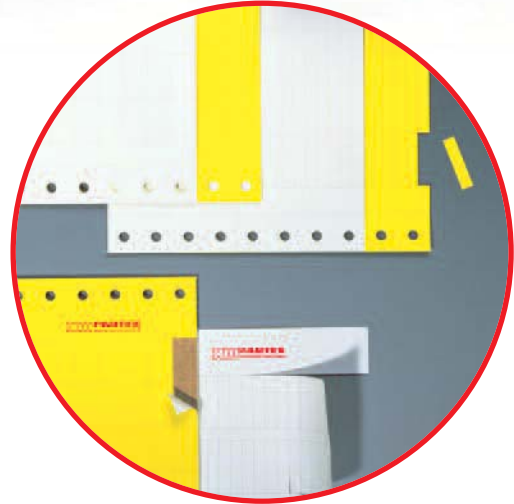

Specifications

Design

Perforated self-adhesive display material with adhesive on paper base. Folded sheets A4 width and tractor feed. 12" sheet length with tear initiation. The PFA label is intended for component marking with the standardized width of 17.5mm.

Material

Self-adhesive polyester foil, specially pre-processed for printing.

Colors

White or yellow.

Print / Text

Printed with aid of WSG-NG-EXCL WinSign software and by recommended laser printer type HP2100/2200. WinSign handles the Windows installed True Type fonts.

Temperature Range

From -30°C to +120°C (-22°F to +248°F)

N.B.: Withstands laser printing.

Durability

Withstands most solvents.


For application in hostile environments, please contact T&B for information.

Application



Dimensions in mm (nominal)

Article Number	Height	Length
PFA20018KT	9.5	17.5



Size and Packaging

Article Number	Number of labels (Lines x columns)	Number of 12" Sheets/Pack	Total number of Labels/Pack
PFA20018KT*	32 x 11	10	3520

Ø = 4 Yellow; 9 White
Order 1 = 10 sheets