

PM Cable Marking

- Transparent holder for cable marking with Partex marking labels, tapes and tags for series PF, PL, PP or PFC.
- Four lengths, three widths cover most cable marking demands.
- Fitting and fastening with Ty-Rap® cable ties. (recommend TY524MX)
- Marking labels can be printed on-site using WSG-NG-EXCL software WinSign and various marking equipment.
- The label is easily inserted into the holder providing fast installation and protection of the marking.



Specifications

Design

Holder for marker tags with punched holes for mounting with cable ties. Two standard lengths in two sizes 9 mm and 12 mm widths. Suitable marker labels and tags are PF on a A4 size sheet and tags on PFC X-cards in credit card formats. Also ProMark PP-profile tags and PL tapes can be used. The labels or tags are easily pushed into the holder and will be protected from dust, oil etc.

Material

Cadmium and silicon free soft PVC according to special formula.

Color

Transparent

Temperature Range

Shape permanence from -30°C to + 60°C
(-22°F to +140°F)

Resistance

The product is tested according to Partex Product Test programme by the Swedish National Test and Research Institute and has the following test properties:

- Flammability resistance according to UL94-V0.
- Resistant to UV radiation, corresponding to 1 year outdoors in the south of Sweden.
- Resistance to chemicals meets Partex Product test Programme.
- Resistance to temperature and ageing meets norms of Partex Product Test Programme.

For application in hostile environments, please contact your Regional Sales Office for information.

Marking methods



Dimensions in mm (nominal)


Article Number	Length (L)	Width (B1)	Thickness (T)	Size of Holes (S)	Width (B2)
PM-10033AN	33	6	1.5	3	5
PM-20033AN		11.3	2.2	3	10
PM-24033AN		13.9	2.5	3.9	12.5
PM-20045AN	45	11.3	2.2	3	10
PM-20066AN	66	13.9	2.5	3.9	12.5
PM-24066AN					
PM-24094					
PM-20KNT	20M	11.3	2.2	-	-
PM-20QKNT				3	10
PM-24KNT		13.9	2.5	-	-
PM-24QKNT				3.9	12.5
PM-20SNT	5M	11.3	2.2	-	-
PM-20QSNT				3	10
PM-24SNT				4M	13.9
PM-24QSNT	3.9	10			



KNT = Ready punched profile with 10 mm's punch distance, 20 meter per carton.
 KNT = Unpunched profile 20 meters per carton.
 AN = Cut marker holders in standard lengths.
 QSNT = Ready punched profile with 100 mm punch distance on compact disc.
 SNT = Unpunched profile on compact disc.

Size and Packaging

Article Number	Description	Number/Pack
PM-10033AN	PM10/33 transparent holder 33 mm cut loose in bag	100 PCS
PM-20033AN	PM20/33 transparent holder 33 mm cut loose in bag	
PM-24033AN	PM20/45 transparent holder 45 mm cut loose in bag	
PM-20066AN	PM20/66 transparent holder 66 mm cut loose in bag	
PM-24033AN	PM24/33 transparent holder 33 mm cut loose in bag	
PM-24066AN	PM24/66 transparent holder 66 mm cut loose in bag	
PM-24094AN	PM24/94 transparent holder 94 mm cut loose in bag	50 PCS
PM-20KNT	PM20 profile transparent	20 M
PM-20QKNT	PM20 profile punched transparent in carton	
PM-24KNT	PM24 profile transparent in carton	
PM-24QKNT	PM24 profile punched transparent in carton	
PM-20SNT	PM20 profile transparent	5 M
PM-20QSNT	PM20 profile punched transparent on compact disc	
PM-24SNT	PM24 profile transparent on compact disc	4 M
PM-24QSNT	PM24 profile punched transparent on compact disc	

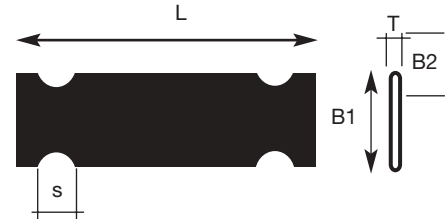

Accessories

Article Number	Suitable Marking Label	Label Height mm
PM-10033AN	PF10021, PP-04200SN	4.2
PM-20033AN	PF20018, Promark PP-09000SN	9.0
PM-20045AN	MTX-MK9-NG-PL090CN, MK8-PL090CN, Promark PP-09000SN	
PM-24033AN	PF20018 1 pce, PFC09518KA	12.0
PM-20066AN	PF20018; 1, 2 or 3 modules, PFC09518KA, Promark PP-09000SN, MK9-PL090CN, MK8-PL090CN	9.0
PM-24066AN	MK9-PL012CN PF20018; 1, 2 or 3 modules, PFC09518KA	12.0
PM-24094AN	MK9-PL090CN	

Regarding marking label PF, marking tag PF and cable ties (page 10). Normally Ty-Rap® of 2.8 mm (e.g. TY5232M) should be used. 4.8 mm widths (e.g. TY525MX) are stronger but require more force to put through the punched holes of the PM sleeve.

