

T & B Express

Multi-Character Marking (Customized Orders)

Multi-character markings allows you to order markers already printed with the combinations of characters required, in accordance with customers specifications, direct from T&B with a 5 to 10 day delivery for orders under 10,000 markers. The information is transferred via e-mail in an Excel format. Purchase order is matched with the Excel file and is sent to Customer Service. We even offer heat shrink markers.

Please consult your Regional Sales Offices for a Quote

<div style="border: 1px solid black; padding: 5px; display: inline-block; margin-bottom: 10px;"> S M S 2 2 - 1 6 T 4 </div> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;">↙</div> <div style="text-align: center;">↙</div> <div style="text-align: center;">↘</div> <div style="text-align: center;">↘</div> </div>			
Serie Type	AWG Range (Size)	Package Option	Chars per Marker*
SMS SMY SMC	e.g. 22-16	T = Unsorted U = Sorted (requires specifications) <u>Others</u> D = Text on two lines S = Large text Q = Punched	4 9 17 30
Standard color for customized markers are yellow unless otherwise stated in customer's excel file.			

*To complete catalogue number, add maximum number of characters required.

SMY and SMS Series



SMY Series



SMS Series

With unique patented grooves for easier mounting and flat top for excellent readability.

Cat. No.	AWG	Max Number of Characters
SMY24-19T*	~24-19	4, 9, 17
SMS22-16T*	~22-16	4, 9, 17, 30
SMS18-14T*	~18-14	
SMS16-11T*	~16-11	
SMS13-5T*	~13-5	
SMS5-T*	~5-	
SMS5-T*		
SMS5-T*		

SMS5 can be delivered with 1 or 2 line text.

SMC Series



SMC Series

Cat. No.	AWG	Max Number of Characters
SMC22-16T*	~22-16	4, 9, 17
SMC16-12T*	~16-12	
SMC12-11T*	~12-11	
SMC11-10T*	~11-10	
SMC7-5T*	~7-5	

Prices are subject to change without notice. All orders will be billed at prices in effect at time of shipment.

GST NOT INCLUDED.

T & B Express


Multi-Character Marking (Customized Orders)

Catalogue No. Construction		
Type	Package Option	Chars per Marker*
SMK2	T = Unsorted QT = Punched unsorted	4
		7
		9
		10
		17
		30

Standard color for customized markers are yellow unless otherwise stated in customer's excel file.

*To complete catalogue number, add maximum number of characters required.

SMK2T and SMK2Q Series



Cat. No.	AWG	Max Number of Characters
SMK2T*	Use with SMKH and SMOH holders	4, 9, 17, 30
SMK2QT10	Use with TY524MX	10
SMK2QT07		7

SMK can be delivered with 1 or 2 line text.
Consult your Regional Sales Office for more information

SMOH Series Holders



Cat. No.	AWG	Max Number of Characters
SMOHT7	Unlimited	10
SMOHT12		18
SMOHT18		28
SMOHT30		28+



Prices are subject to change without notice. All orders will be billed at prices in effect at time of shipment.

GST NOT INCLUDED.

T & B Express

Multi-Character Marking (Customized Orders)

Catalogue No. Construction			
Type	Max Dia. (in.)	Package Option	Chars per Marker*
SMO HSZ	e.g. 0.063	T = Unsorted U = Sorted	4 9 17 30

Standard color for customized markers are yellow unless otherwise stated in customer's excel file.

*To complete catalogue number, add maximum number of characters required.

SMO Oval Series: Oval marking profile



SMO Oval Series



SMO Series




SMO Oval Series

Cat. No.	Dia. (in.) min/max	AWG	Max Number of Characters
SM0071T*	0.051/0.071	-23-20	4, 9, 17, 30
SM0087T*	0.067/0.087	-20-18	
SM0098T*	0.079/0.098	-18-17	
SM0110T*	0.087/0.110	-17-15	
SM0138T*	0.106/0.138	-15-13	
SM0157T*	0.126/0.157	-13-11	
SM0185T*	0.150/0.185	-12-9	
SM0217T*	0.181/0.217	-9-7	
SM0276T*	0.220/0.276	-7-5	
SM0315T*	0.256/0.315	-5-3	
SM0374T*	0.276/0.374	-4-3	
SM0384T*	0.295/0.394	-4-2	
SM0472T*	0.374/0.472	-1/0	
SM0551T*	0.453/0.551	-1/0-2/0	
SM0630T*	0.531/0.630	-2/0-3/0	
SM0709T*	0.610/0.709	-3/0-4/0	
SM0787T*	0.689/0.787	-4/0	
SM0866T*	0.788/0.866	-4/0-5/0	
SM0945T*	0.846/0.945	-5/0-6/0	
SM01104T*	0.947/1.104	-6/0-7/0	

HSZ Series

Flexible zero halogen thin wall polyolefin heat shrink tubing for marking on site.

- Excellent properties of fire safety.
- Low smoke generation and evolution of acid gases.
- Flexible and easy mounted on cables and wires.
- 2 : 1 shrink ratio.

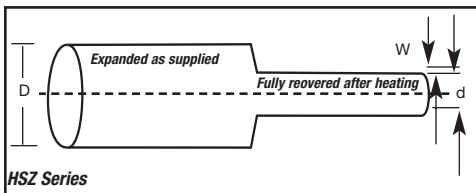

HSZ Series

Cat. No.	Expanded		Recovered				AWG	Max Number of Characters
	Internal Dia. (max.) D		Internal Dia. (max.) d		Wall Thick. (nom.) W			
	mm	in.	mm	in.	mm	in.		
HSZ063T*	1.6	1/16	0.8	1/32	0.45	0.015	-	4, 9, 17, 30
HSZ093T*	2.4	3/32	1.2	3/64	0.51	0.020	-	
HSZ125T*	3.2	1/8	1.6	1/16			24-30	
HSZ187T*	4.8	3/16	2.4	3/32			14-22	
HSZ250T*	6.4	1/4	3.2	1/8	0.64	0.025	10-16	
HSZ375T*	9.5	3/8	4.8	3/16			6-12	
HSZ500T*	12.7	1/2	6.4	1/4	0.79	0.030	1-6	
HSZ750T*	19	3/4	9.5	3/8			4/0-2	
HSZ1000T*	25.4	1	12.7	1/2	0.89	0.035	350-2/0	
HSZ1500T*	38.1	1-1/2	19	3/4	1.02	0.040	750-3/0 kcmil	
HSZ2000T*	50.8	2	25.4	1	1.14	0.045	250-600 kcmil	

Prices are subject to change without notice. All orders will be billed at prices in effect at time of shipment.

GST NOT INCLUDED.

Packaging options for customized order




Unsorted Package

Unsorted in a loop in sequential manner based on how markers are on customer Excel file



Cat. No.: MUA

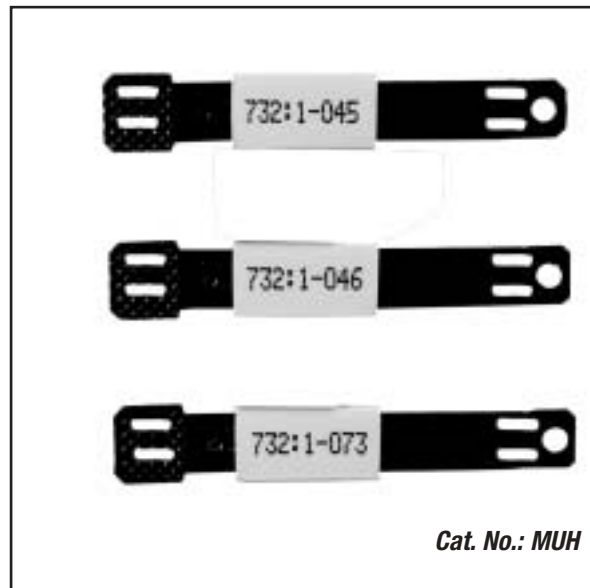

Cat. No.: MUH

Sorted-marking sleeves packed entirely according to customer requirements, in packs with sorting designations.